




AQUALUMA™

UNDERWATER LIGHTING

- No Lens seal to leak.
- Very low DC power consumption.
- Approx. 0.5 of an amp per light @ 12 volts or 0.3 of an amp @ 24 volts.
- Very low heat emission.
- Can be operated out of the water.
- Long life, high output LED light engine.
- High impact resistant polycarbonate housing.
- No bonding to anodes required. (Housing cannot corrode)
- Light engine will accept 12 or 24 volt DC power source.
- Serviceable from inside the boat.
- Available in white, green or blue.
- Each Light comes with 3.7 metres of cable.
- Australian designed and manufactured.
- Easy install = low installation cost.

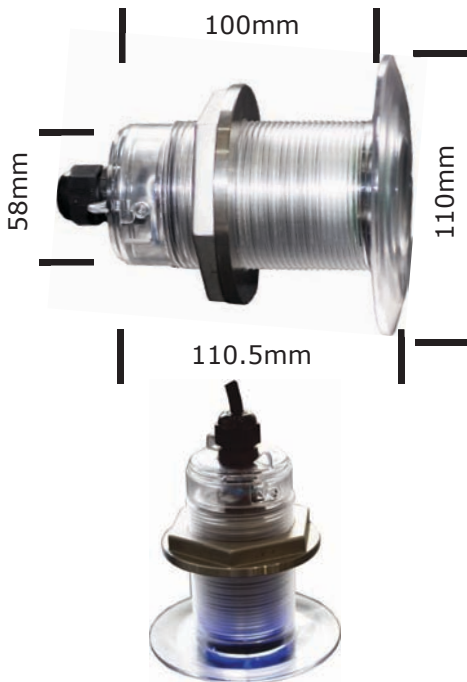

- No Lens seal to leak.
- Very low DC power consumption.
- Approx. 0.5 of an amp per light @ 12 volts or 0.3 of an amp @ 24 volts.
- Very low heat emission.
- Can be operated out of the water.
- Long life, high output LED light engine.
- High impact resistant polycarbonate housing.
- No bonding to anodes required. (Housing cannot corrode)
- Light engine will accept 12 or 24 volt DC power source.
- Serviceable from inside the boat.
- Available in white, green or blue.
- Each Light comes with 3.7 metres of cable.
- Australian designed and manufactured.
- Easy install = low installation cost.

TYPE
APPROVED
PRODUCT



CE

International Patent Application
No. PCT/AU2006/000300



WWW.AQUALUMA.COM